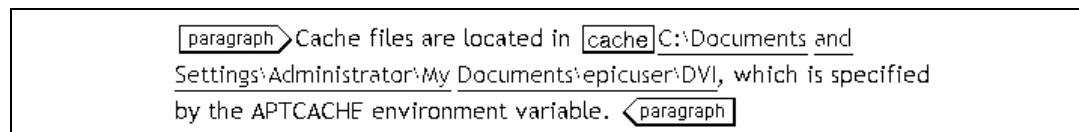


In the following example, the value of the APTCACHE environment variable is displayed in the Edit window. Its value is the path to cache files, which the FOSI uses as a link. Double-clicking on the gentext in the Edit window opens a browser window for the designated directory.

Figure 67 Attname is environment variable



FOSI fragment

```
<e-i-c gi="cache">
<charlist inherit="1" charsubsetref="inline"></charlist>
<att>
<fillval attname="APTCACHE" attloc="SYSTEM-VAR" fillcat="link" fillchar="href">
<fillval attname="APTCACHE" attloc="SYSTEM-VAR" fillcat="usetext" fillchar="source">
<charsubset>
<link>
<usetext>
<subchars charsubsetref="underline">
...

```

The next example shows the use of editor-only, print-only, and html-only.

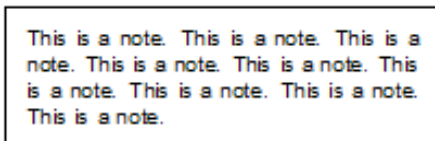
Figure 68 Editor-only, print-only, html-only

```
<att>
<specval attname="editor-only" attloc="SYSTEM-VAR" attval="yes">
<charsubset>
<indent inherit="1" firstln="*" leftind="2pi" rightind="0pt">
...
<att>
<specval attname="print-only" attloc="SYSTEM-VAR" attval="yes">
<charsubset>
<indent inherit="1" firstln="*" leftind="3pi" rightind="3pi">
...
<att>
<specval attname="html-only" attloc="SYSTEM-VAR" attval="yes">
<charsubset>
<indent inherit="1" firstln="*" leftind="2pi" rightind="2pi">
...

```

In the following example, the half-point rule in the print/PDF output appears too heavy in HTML output. html-only specifies a lighter weight.

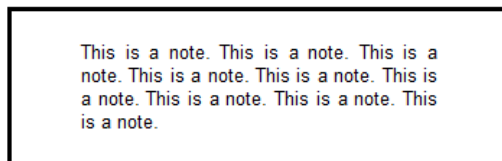
NOTE: Boxing is not displayed in the Edit window.

Figure 69 Print/PDF output


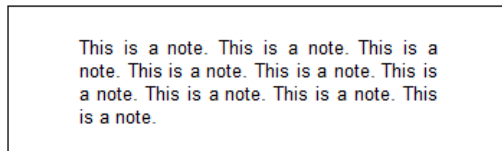
This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note.

```
<e-i-c gi="note">
<charlist inherit="1" charsubsetref="block">
<font inherit="1" style="sanserif">
<indent inherit="1" leftind="3pi" rightind="3pi" firstln="*">
<boxing toffset="10pt" boffset="10pt" loffset="10pt" roffset="10pt"
siderel="content"
fthick="0.5pt" bthick="0.5pt" lthick="0.5pt" rthick="0.5pt"
ttype="tsingle" btype="bsingle" ltype="lsingle" rtype="rsingle">
...

```

Figure 70 HTML output without html-only


This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note.

Figure 71 Html-only specifies a lighter rule weight


This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note. This is a note.

```
<att>
<specval attname="html-only" attloc="SYSTEM-VAR" attval="yes">
<charsubset>
<boxing ttype="tsingle" btype="bsingle" ltype="lsingle" rtype="rsingle">
toffset="10pt" boffset="10pt" loffset="10pt" roffset="10pt" siderel="col"
fthick="0.25pt" bthick="0.25pt" lthick="0.25pt" rthick="0.25pt"
...

```

The following example illustrates using an attribute value from a previous sibling element. A sibling's attribute value cannot be directly accessed with an attribute rule the way an ancestor element can be. In this case, the color for the document is specified in the <title> color attribute. It is used as the font color for <description> as well as the background color for <title>.